

GOLDENROD UTV VISOR



WARNING: READ INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO INSTALL.
RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.



IMPORTANT SAFETY INFORMATION


- This product uses strong magnets. Swallowed magnets can stick together across intestines causing serious infections and death. Seek immediate medical attention if magnets are swallowed or inhaled.
- Pinch points. Keep hands clear of magnets and hinging components.
- Recommended for use on vehicles with a windshield, as flying rocks or debris may impact visor.
- Do not use in the tilted back position.
- Do not touch with oily or dirty hands; only use a clean, soft cloth.



Installation – No tools needed for installation. Simply use the two strong magnets to attach the visor to a flat metal surface. Position as desired.

OPERATING INSTRUCTIONS – The visor is a 13.5" X 8" clear polycarbonate sheet with a hinge and a slider for maximum adjustability. Once installed, the visor can be folded into an upward position if it is not desired. The visor can be pushed side-to-side to catch the sun at all hours of the day without adjusting the position of the visor.

Tension Adjustment – The tension screw is located on the side of the hinge. Using a Phillips head screwdriver, turn the tension screw clockwise to increase the tension and counterclockwise to decrease the tension. Adjust to the desired tightness, being sure to not over-tighten.

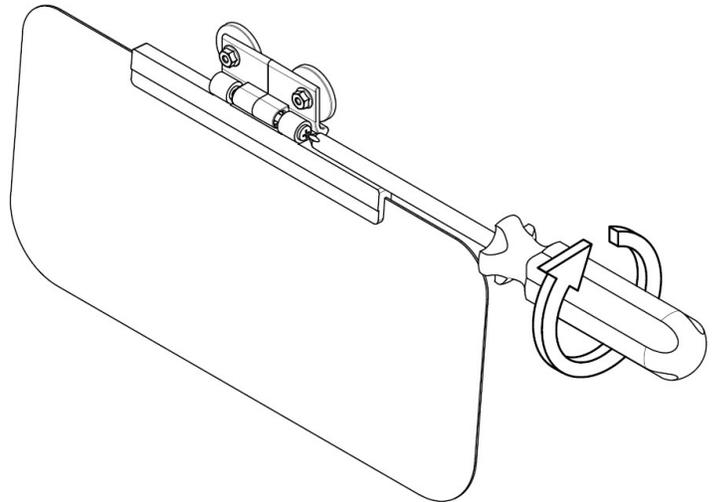

A Dependable Company Since 1886
DUTTON-LAINSON COMPANY
Hastings, NE 68902 U.S.A. • Tel 402-462-4141 • Fax 402-460-4612
www.dutton-lainson.com • E-mail: dlsales@dutton-lainson.com

ISO 9001 Certified Q.M.S.

©2025 CORNHUSKER PRESS